




# PRODUCT DATA SHEET

## FIRE AND DRAFT SEALANTS

- ◆ Water-based
- ◆ Non-combustible
- ◆ Non-corrosive
- ◆ Non-toxic
- ◆ Odorless
- ◆ Environmentally safe
- ◆ Easy gunability
- ◆ Water-resistant
- ◆ Bonds to most material

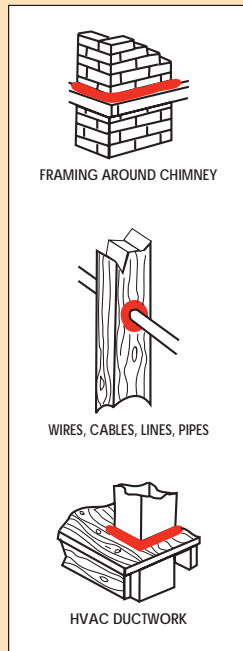

Underwriters Laboratories, Inc.  
Classified Caulking and Sealants

Surface Burning Characteristics  
Applied To Inorganic Reinforced Cement Board\*  
Flame Spread 0 Smoke Spread 0

Also classified in accordance with ASTM-E136 (current edition) "Standard test method for the behavior of materials in a vertical tube furnace at 750°C." See UL Building Materials Directory.



# Fire Break™ 136

RESIDENTIAL, NON-EXPANDING  
FIRE & DRAFT SEALANT



## Touch 'n Seal® Fire Break 136

*This is a non-combustible sealant used for firestopping applications around plumbing, duct work, wiring, framing around chimneys, masonry, other penetrations and construction voids. Product is used in construction where an ASTM-E136 non-combustible sealant is required. Fire Break Caulk is colored red for ease of inspection, is non-corrosive, non-toxic, environmentally safe and paintable when dry. Product has a 2 hour rating per ASTM E814 and UL 1479.*

### TECHNICAL DATA:

- ◆ ASTM E-136, ASTM E-814, UL 1479
- ◆ 61RF
- ◆ For internal applications only
- ◆ Non-expanding, non-combustible
- ◆ Cure Time: 21 days (77° F, 50% RH)
- ◆ Application Temperature: 50° F to 100° F
- ◆ Shelf Life: 12 months
- ◆ Cures to slightly flexible state

**DIRECTIONS:** Surface must be clean, dry, sound and frost-free for proper adhesion. Cut tip off cartridge at the desired angle (45° is ideal). For a smooth seal, hold at 45° angle and apply by pushing the fire caulk ahead of the nozzle. Excess material can be smoothed with a putty knife or cleaned with a damp cloth.

**SPECIFICATIONS:** Fire Break 136 meets or exceeds the requirements of ASTM E-136 firestop rating.

**STORAGE:** Shelf life is 12 months from date of manufacture. Store in a cool, dry place where the maximum temperature will not exceed 150°F. Do not freeze.

**CAUTION:** Direct contact of uncured sealant irritates eyes and may irritate skin. Not for internal consumption. Use with adequate ventilation. In case of eye contact, flush eyes with water for 15 minutes and call a doctor. In case of skin contact, wash off with clean, soapy water. Keep out of reach of children.

# Fire Break™ 814

COMMERCIAL, NON-EXPANDING  
FIRE & DRAFT SEALANT



## Touch 'n Seal® Fire Break 814

*This is a commercial grade, UL classified intumescent flexible sealant. Designed and tested to seal all interior/exterior voids around most commercial and residential penetrations. Passes the stringent ASTM E-814 test for "Through Penetrations", (UL-1479) and is rated commercially for 2 hours. Fire Break 814 remains flexible when cured, making it ideal for all types of vertical and horizontal joints.*

### TECHNICAL DATA:

- ◆ ASTM-E-814
- ◆ Intumescent
- ◆ 2 hour UL rating
- ◆ UL 1479
- ◆ Classified for "through penetrations"
- ◆ Fully cured in 8-10 days
- ◆ Application Temperature: -20° F to 118° F
- ◆ Stays flexible after curing
- ◆ Shelf Life: 12 months

**DIRECTIONS:** Surface must be clean, dry, sound and frost-free for proper adhesion. Cut tip off cartridge at the desired angle (45° is ideal). For a smooth seal, hold at 45° angle & apply by pushing the fire caulk ahead of the nozzle. Excess material can be smoothed with a putty knife or cleaned with a damp cloth.

**SPECIFICATIONS:** Fire Break 814 meets & passes ASTM E-814, UL-1479. Classified by UL for through penetrations.

**STORAGE:** Shelf life is 12 months from date of manufacture. Store in a cool, dry place where the maximum temperature will not exceed 150°F. Do not freeze.

**CAUTION:** Direct contact of uncured sealant irritates eyes and may irritate skin. Not for internal consumption. Use with adequate ventilation. In case of eye contact, flush eyes with water for 15 minutes & call a doctor. In case of skin contact, wash off with clean, soapy water. Keep out of reach of children.

PRODUCT	ITEM NO.	CASE PACK	CASE WT. (lbs.)	PALLET QTY.
Fire Break - 136	4004523520	12	18.4	108
Fire Break - 814	4004523530	12	18.4	108

