




TECHNICAL DATA SHEET

2400 Boston Street | Suite 200 | Baltimore, MD | 21224

AP[®] TOUCH 'N SEAL[®] LINER BOND FOAM ADHESIVE - White

PRODUCT DESCRIPTION

DAP[®] Touch 'n Seal[®] Liner Bond Foam Adhesive is a 1-component foam adhesive used inside refrigerated trailers to bond fiberglass liners to prepared spray foam insulation and aluminum posts. Liner Bond offers total liner adhesion with a 30 minutes dry-time, allowing time for proper liner placement. This portable, disposable, gun-applied adhesive is ideal for new trailers, repairs in hard to reach areas, and to help return damaged trailers to original insulation efficiency.

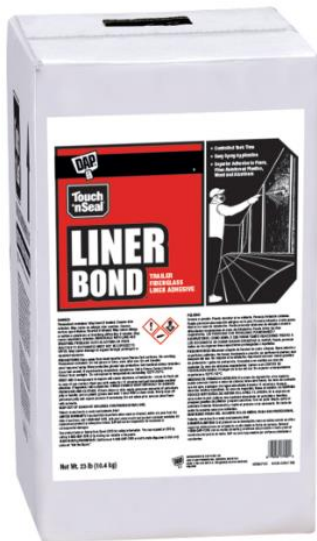

Meets ASTM E84 Class I

PACKAGING	Case	COLOR	UPC
23 lb Cylinder	1	White	7565017100
23 lb Cylinder (Replacement)	1	White	7565017101

KEY FEATURES & BENEFITS

- Fast and easy spray gun application
- Controlled tack time for proper liner placement
- Total cure in 24 hours reduces trailer downtime
- Ready-to-use, portable, disposable units
- Non-flammable



TECHNICAL DATA SHEET

2400 Boston Street | Suite 200 | Baltimore, MD | 21224

SUGGESTED USES

Basic Use:

- Bonding trailer liners

FOR BEST RESULTS

- Apply with chemical content temperatures between 60°F- 90°F
- Surface must be clean, dry, and free of all foreign material for adhesion

APPLICATION

DIRECTIONS: Important – read all directions and cautions before use. Always wear gloves, eye protection and work clothes. Use drop cloths. Product is flammable during dispensing - turn off sources of ignition prior to use. Always refer to local building codes prior to application of Touch n' Seal sealants. **CYLINDER MAY BURST IF LEFT IN HOT VEHICLE, EXPOSED TO DIRECT SUNLIGHT OR TEMPERATURES ABOVE 122°F (50°C).**

Preparation / Application: To ensure optimum performance, remove cylinder and turn on its side. While holding by ends, shake for one minute with a side-to-side motion. Stand cylinder upright. Attach hose to cylinder, tighten with wrench (do not over-tighten). Attach gun to hose. Fully open cylinder valve. Depress trigger. Conduct a test spraying onto scrap material to ensure product flow. Product flow can be regulated by closing the cylinder valve slightly, or by partially squeezing the trigger, or by adjusting the control knob on the applicator. Excessive flow rate may cause product to splash off wall. Apply Liner Bond insuring 100% coverage by spraying up to a thickness of 1 inch. Install liner, adjust as needed. Support liner in place until adhesive is cured, usually within 24 hours. Curing time may vary based on temperature and humidity.

Clean-up: If wet foam contacts skin, clean immediately with a dry rag – do not use water – water accelerates curing. Cured foam must be removed mechanically from surfaces. Uncured foam can be cleaned from most surfaces with Foam Cleaner or acetone. If foam dries on skin, apply generous amounts of petroleum jelly, put on plastic gloves and wait 1 hour. With a clean cloth, firmly wipe off residue and repeat process if necessary. DO NOT use acetone or other solvents to remove product from skin.

Storage & Disposal. Keep container tightly closed in a cool, well-ventilated area. Store upright below 90° F (33°C). Do not expose containers to conditions that may damage, puncture, or burst the containers. Dispose of leftover material / containers in accordance with Federal, state, and local regulations. See SDS for more information.



TECHNICAL DATA SHEET

2400 Boston Street | Suite 200 | Baltimore, MD | 21224

TYPICAL PHYSICAL & CHEMICAL PROPERTIES

Yield	275 sq. ft. *use 2 tanks per side wall
Dry Time/ Tack Free	Up to 30 min at 70°F with 55% RH
Cure Time	24 hours
Shelf Life	18 months (unopened)

SAFETY

See product label or Safety Data Sheet (SDS) for health and safety information. You can request an SDS by visiting our website at dap.com or calling 888-DAP-TIPS.

WARRANTY

LIMITED WARRANTY: If the product fails to perform when used as directed, within one year from the date of purchase, call 888-DAP-TIPS, with your sales receipt and product container available, for replacement product or sales price refund. DAP Products Inc. will not be responsible for incidental or consequential damages.

COMPANY IDENTIFICATION

Manufacturer: DAP Products Inc., 2400 Boston Street, Baltimore, Maryland 21224

Usage Information: Call 888-DAP-TIPS or visit dap.com & click on "Ask the Expert"

Order Information: 800-327-3339 or orders@dap.com

Fax Number: 410-558-1068

Also, visit the DAP website at dap.com